


## RBF Heat Trace or Pipe Sensor

- Heat Trace or Pipe Sensing Applications
- 316 Stainless Steel Sheath
- Moisture Resistant Heads
- 3/4" or 1/2" NPT Threaded Extension Wire Opening
- 4" to 8" Cold Leg Standard for Varying Insulation Depths
- 100 ohm RTD,  $\pm .12\%$  Accuracy
- Fiberglass Insulated RTD Probe
- RTD or Universal Transmitter Available (Must Specify Temperature Range)

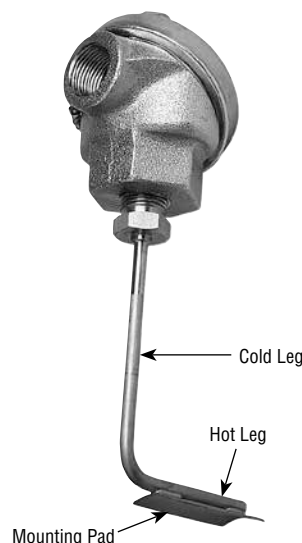

### Description

For measuring the surface temperature of process piping that is carrying products whose temperatures must be controlled to prevent freeze-up, or to maintain a viscosity level so that the inner medium will flow. The RTD Sensor Element is made up with a 316SS sheath, and with a stainless steel mounting pad. Cold legs are available in customer specified lengths to accommodate pipe insulation thickness.

Model	Sensor	Insulation	Common Junction	Range (°F)	
				Min	Max
RBF185M-HT	RTD	Fiberglass		-100	900
		Sheath Leg Lengths			
	Code	Hot	Cold		
	304	3"	4"		
	306	3"	6"		
	308	3"	8"		
		Code	Mounting Pads		
		18RD	Fits All Pipe Sizes*		
			Code	Connection Heads	
			31SB/C	Aluminum	
			49SB/C	Flip top Aluminum Head	
			91SB/C	316L Stainless Steel	
			93SB/C	Aluminum	
			94SB/C	316L Stainless Steel	

**RBF-185M-HT      304      18RD      31SB/C**

\*Mounting pads conform to pipe with pipe clamps

† Replaces RBF185M-HT-0304-18RD-71SB/C

### In Stock:

Model	PCN	Stock Status
RBF185M-HT-304-18RD-31SB/C	317315	ST
RBF185M-HT-304-18RD-93SB/C	317340	ST
RBF185M-HT-304-18RD-49SB/C	399517	NS
RBF185M-HT-304-18RD-91SB/C	317323	NS
RBF185M-HT-304-18RD-94SB/C	399550	NS